




# LHR Series-High Rate

## LHR1226W(12V26W)

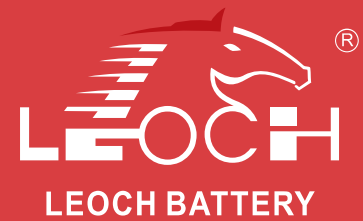


### Specifications

Rated Voltage	12V		
Nominal Rate ( $W_{15}$ , 1.67V/cell)	26W		
Nominal Capacity( $C_{10}$ , 1.80V/cell)	6.5Ah		
Dimension	Length	151±1mm (5.94 inches)	
	Width	65±1mm (2.56 inches)	
	Container Height	93.5±1mm (3.68 inches)	
	Total Height	99±1mm (3.90 inches)	
Approx. Weight	2.08 Kg (4.54 lbs)		
Terminal	T1		
Container Material	ABS: UL 94 HB or V-0		
Rated Capacity (25°C)	6.51 Ah	(10hr, 0.651A, 1.80V/cell)	
	6.38 Ah	(8hr, 0.798A, 1.80V/cell)	
	6.00 Ah	(5hr, 1.20A, 1.75V/cell)	
	5.52 Ah	(3hr, 1.84A, 1.75V/cell)	
	4.49 Ah	(1hr, 4.49A, 1.67V/cell)	
Max. Discharge Current	90A		
Internal Resistance (25°C)	Approx. 29mΩ		
Operating Temp. Range	Discharge	-20 ~ 55°C (-4 ~ 131°F)	
	Charge	-20~ 40°C (-4 ~ 104°F)	
	Storage	-15 ~ 50°C (5 ~ 122°F)	
Nominal Operating Temp. Range	25±3°C (77±5°F)		
Max. Charging Current(25°C)	1.75A		
Charge voltage(25°C)	Charge voltage	Temp. Coefficient	
	Float	2.25 ~2.30V/cell	-3mV/cell/°C
Effect of temp. to Capacity	Equalization	2.30~2.40V/cell	-4mV/cell/°C
	40°C (104°F)	106%	
	25°C (77°F)	100%	
Self Discharge	0°C (32°F)	86%	
	≤3%/month @ 25°C		



### Layout

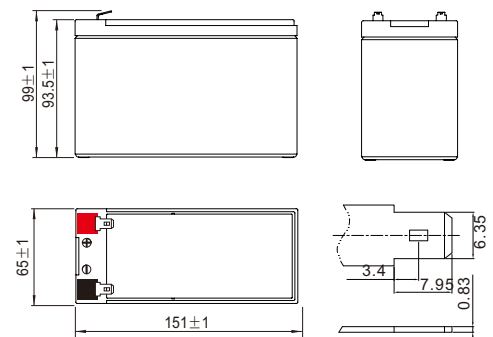

### Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	17.2	11.6	9.92	7.95	5.90	4.37	3.70	2.77	2.21	1.66	1.31	1.09	0.745	0.610
1.80V/cell	20.0	13.7	11.5	9.16	6.67	4.89	4.09	3.03	2.41	1.79	1.41	1.18	0.798	0.651
1.75V/cell	21.8	14.7	12.2	9.61	6.97	5.09	4.25	3.13	2.48	1.84	1.45	1.20	0.812	0.661
1.70V/cell	23.6	15.7	12.9	10.1	7.28	5.28	4.40	3.23	2.56	1.89	1.49	1.23	0.827	0.671
1.67V/cell	24.7	16.3	13.3	10.4	7.46	5.40	4.49	3.29	2.60	1.92	1.51	1.25	0.836	0.677
1.60V/cell	27.3	17.6	14.2	11.0	7.87	5.67	4.71	3.44	2.71	1.99	1.56	1.28	0.855	0.692

### Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	37.1	24.6	20.5	15.3	11.4	8.48	7.19	5.39	4.33	3.25	2.58	2.15	1.47	1.21
1.80V/cell	41.6	28.3	23.4	17.5	12.8	9.41	7.91	5.87	4.68	3.50	2.77	2.31	1.57	1.29
1.75V/cell	44.7	29.9	24.4	18.2	13.2	9.72	8.14	6.03	4.80	3.58	2.83	2.36	1.60	1.30
1.70V/cell	47.3	31.4	25.5	18.9	13.7	10.0	8.38	6.19	4.93	3.67	2.89	2.40	1.62	1.32
1.67V/cell	49.0	32.3	26.0	19.3	14.0	10.2	8.51	6.28	4.99	3.71	2.92	2.43	1.64	1.33
1.60V/cell	49.7	34.4	27.4	20.3	14.6	10.6	8.85	6.51	5.16	3.83	3.00	2.49	1.67	1.36



# LHR Series-High Rate

## LHR1226W(12V26W)



### Applications

- UPS
- Hospitals & Testing Laboratories
- Emergency Power Supply
- Industrial Process Control Facilities
- Banks & Financial Markets
- Data & Network Operation Centers


### General Features

- High quality AGM separator: extend cycle life and prevent micro short circuit
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- Unique vent valve design: reduce water losing and prevent air/spark going inside


### Standards

- Compliance with IEC 60896 standards
- Classified as "General Purpose" according to Eurobat
- CE, UL, IEC Certified
- Manufactured in Leoch@IATF16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


### Discharge Characteristics

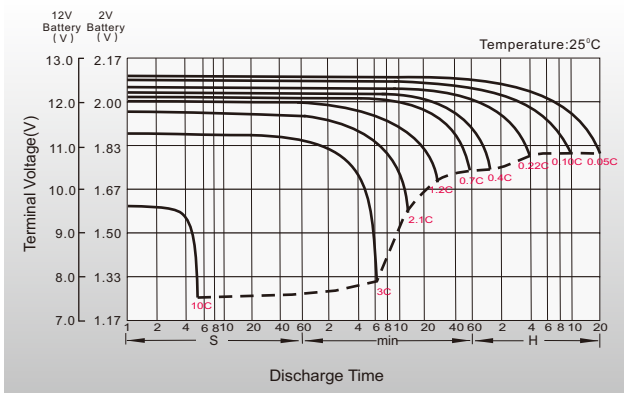


### Float Charging Characteristics

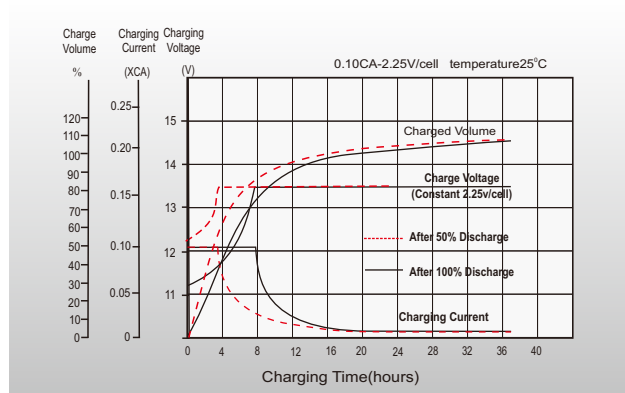

### Temperature Effects in Relation to Battery Capacity

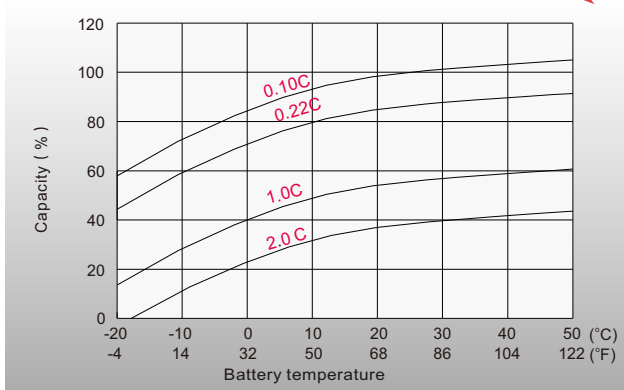

### Effect of Temperature on Long Term Float Life

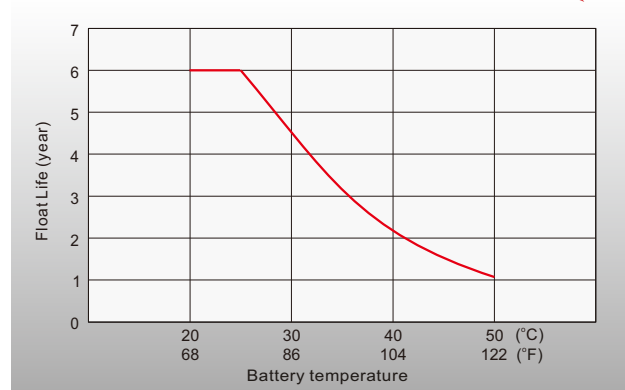

## Sales Offices Worldwide

#### China Sales Office

5th Floor, Xinhaohui Bldg., Nanhai Blvd.,  
Nanshan, Shenzhen, China. 518052  
Tel: +86-755-86036060 (100 lines)  
Fax: +86-755-26067269  
E-mail: export@leoch.com

#### HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,  
Tsuen Wan, New Territories, Hong Kong  
Tel: +852 35786666  
Fax: +44 1452 690125  
E-mail: sales.hk@leoch.com

#### Singapore Sales Office

No. 1 Tech Park Crescent,  
Singapore 638131  
Tel: +65 68636078  
Fax: +65 6863 6079  
Email: sales.sg@leoch.com

#### Australia Sales Office

2 /29 Tarlington Place, Smithfield. NSW 2164  
Australia  
Tel: 02 9756 0950  
E-mail: sales.au@leoch.com

#### North America Sales Office

19751 Descartes  
Foothill Ranch, CA 92610, USA  
Tel: 949-588-5853  
Fax: 949-588-5966  
E-mail: sales@leoch.us  
Http:// www.leoch.us

#### UK Sales Office

9B Wheatstone Court, Waterwells, Business Park,  
Gloucester, GL2-2AQ, UK United Kingdom  
Tel: +44(0) 1452 729428 / 1452 729696  
Fax: +44 1452 690125  
E-mail: Sales.Europe@leoch.com  
Http:// www.leoch.eu

#### EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,  
Greece  
Tel: +30 210 5760318 (2 lines)  
E-mail: support\_EMEA@leoch.com  
Http:// www.leoch.eu

#### India Sales Office

Shed no. A-53(b), 2nd Stage of Peenya Industrial Area,  
Bangalore North Taluk, Bangalore-560058, India  
Tel: +91-80-23440018/23440019  
Fax: +91-80-23440017  
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)

© 2022 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.  
Subject to revisions without prior notice.

Publication No.: LB-LHR1226W-PD-EN-V1.4-202204