



# LHR Series-High Rate

## LHR1235W(12V35W)




### Specifications

Rated Voltage	12V		
Nominal Rate ( $W_{15}$ , 1.67V/cell)	35W		
Nominal Capacity( $C_{10}$ , 1.80V/cell)	7.8Ah		
Dimension	Length	151±1mm (5.94 inches)	
	Width	65±1mm (2.56 inches)	
	Container Height	93.5±1mm (3.68 inches)	
	Total Height	99±1mm (3.90 inches)	
Approx. Weight	2.50 Kg (5.51 lbs)		
Terminal	T2		
Container Material	ABS: UL 94 HB or V-0		
Rated Capacity (25°C)	7.81 Ah	(10hr, 0.781A, 1.80V/cell)	
	7.66 Ah	(8hr, 0.958A, 1.80V/cell)	
	7.20 Ah	(5hr, 1.44A, 1.75V/cell)	
	6.63 Ah	(3hr, 2.21A, 1.75V/cell)	
	5.46 Ah	(1hr, 5.46A, 1.67V/cell)	
Max. Discharge Current	108A		
Internal Resistance (25°C)	Approx. 20mΩ		
Operating Temp. Range	Discharge	-20 ~ 55°C (-4 ~ 131°F)	
	Charge	-20~ 40°C (-4 ~ 104°F)	
	Storage	-15 - 50°C (5 ~ 122°F)	
Nominal Operating Temp. Range	25±3°C (77±5°F)		
Max. Charging Current(25°C)	2.00A		
Charge voltage(25°C)	Charge voltage	Temp. Coefficient	
	Float	2.25 ~2.30V/cell	-3mV/cell/°C
	Equalization	2.30~2.40V/cell	-4mV/cell/°C
Effect of temp. to Capacity	40°C (104°F)	106%	
	25°C (77°F)	100%	
	0°C (32°F)	86%	
Self Discharge	≤3%/month @ 25°C		



### Layout

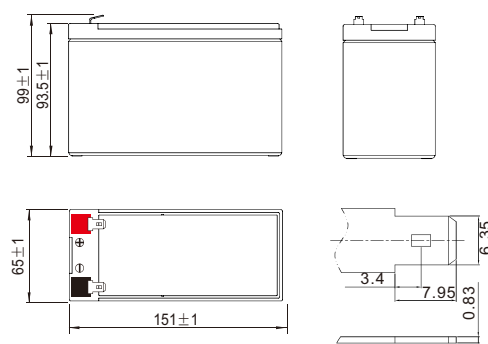

### Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	24.8	16.5	13.4	10.4	7.75	5.62	4.49	3.32	2.66	1.99	1.57	1.31	0.894	0.732
1.80V/cell	28.9	19.5	15.5	12.0	8.76	6.28	4.97	3.63	2.89	2.15	1.70	1.41	0.958	0.781
1.75V/cell	31.6	20.9	16.4	12.6	9.16	6.54	5.16	3.75	2.98	2.21	1.74	1.44	0.975	0.793
1.70V/cell	34.2	22.3	17.4	13.3	9.56	6.79	5.35	3.88	3.07	2.27	1.78	1.48	0.992	0.806
1.67V/cell	35.7	23.2	17.9	13.6	9.80	6.94	5.46	3.95	3.13	2.31	1.81	1.50	1.00	0.813
1.60V/cell	39.4	25.1	19.2	14.5	10.3	7.29	5.72	4.13	3.26	2.39	1.87	1.54	1.03	0.830

### Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	47.3	31.7	26.6	20.1	15.0	10.9	8.73	6.47	5.19	3.90	3.09	2.58	1.77	1.45
1.80V/cell	54.5	37.0	30.5	22.9	16.8	12.1	9.60	7.04	5.62	4.20	3.32	2.77	1.89	1.54
1.75V/cell	58.7	39.2	32.9	23.8	17.4	12.5	9.88	7.23	5.76	4.30	3.39	2.83	1.92	1.57
1.70V/cell	62.7	41.3	34.3	24.8	18.0	12.9	10.2	7.43	5.91	4.40	3.47	2.88	1.95	1.59
1.67V/cell	64.9	42.5	35.0	25.3	18.4	13.1	10.3	7.54	5.99	4.45	3.51	2.91	1.97	1.60
1.60V/cell	70.7	45.5	36.9	26.6	19.2	13.6	10.7	7.81	6.20	4.59	3.60	2.99	2.01	1.63



# LHR Series-High Rate

## LHR1235W(12V35W)



### Applications

- UPS
- Hospitals & Testing Laboratories
- Emergency Power Supply
- Industrial Process Control Facilities
- Banks & Financial Markets
- Data & Network Operation Centers


### General Features

- High quality AGM separator: extend cycle life and prevent micro short circuit
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- Unique vent valve design: reduce water losing and prevent air/spark going inside


### Standards

- Compliance with IEC 60896 standards
- Classified as "General Purpose" according to Eurobat
- CE, UL, IEC Certified
- Manufactured in Leoch@IATF 16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


### Discharge Characteristics

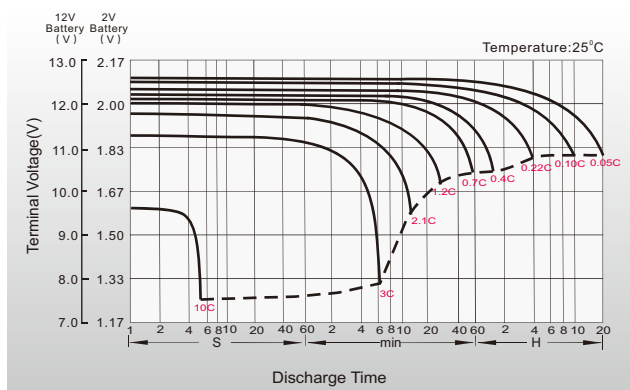


### Float Charging Characteristics

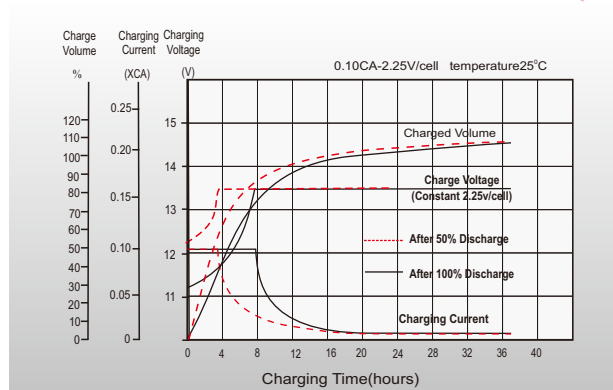

### Temperature Effects in Relation to Battery Capacity

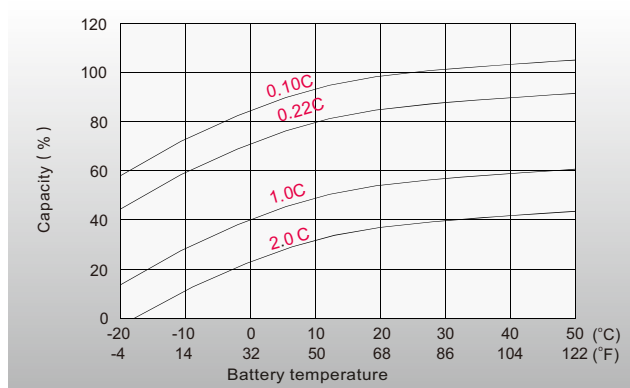

### Effect of Temperature on Long Term Float Life

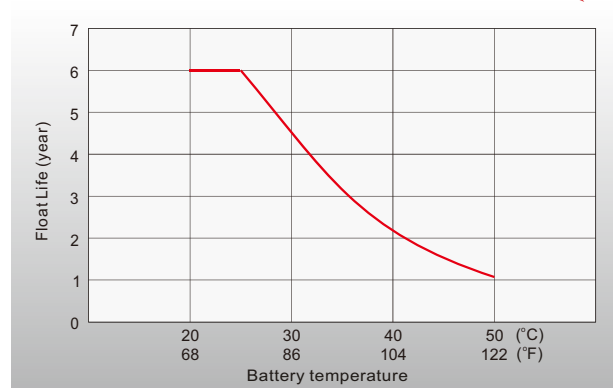

## Sales Offices Worldwide

#### China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,  
Nanshan, Shenzhen, China. 518052  
Tel: +86-755-86036060 (100 lines)  
Fax: +86-755-26067269  
E-mail: export@leoch.com

#### HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,  
Tsuen Wan, New Territories, Hong Kong  
Tel: +852 35786666  
Fax: +44 1452 690125  
E-mail: sales.hk@leoch.com

#### Singapore Sales Office

No. 1 Tech Park Crescent,  
Singapore 638131  
Tel: +65 68636078  
Fax: +65 6863 6079  
Email: sales.sg@Leoch.com

#### Australia Sales Office

2 /29 Tarlington Place, Smithfield. NSW 2164  
Australia  
Tel: 02 9756 0950  
E-mail: sales.au@leoch.com

#### North America Sales Office

19751 Descartes  
Foothill Ranch, CA 92610, USA  
Tel: 949-588-5853  
Fax: 949-588-5966  
E-mail: sales@leoch.us  
Http:// www.leoch.us

#### UK Sales Office

9B Wheatstone Court, Waterwells, Business Park,  
Gloucester, GL2-2AQ, UK United Kingdom  
Tel: +44(0) 1452 729428 / 1452 729696  
Fax: +44 1452 690125  
E-mail: Sales.Europe@leoch.com  
Http:// www.leoch.eu

#### EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,  
Greece  
Tel: +30 210 5760318 (2 lines)  
E-mail: support\_EMEA@leoch.com  
Http:// www.leoch.eu

#### India Sales Office

Shed no. A-53(b), 2nd Stage of Peenya Industrial Area,  
Bangalore North Taluk, Bangalore-560058, India  
Tel: +91-80-23440018/23440019  
Fax: +91-80-23440017  
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)

© 2022 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.  
Subject to revisions without prior notice.

Publication No.: LB-LHR1235W-PD-EN-V1.4-202204