




# PLH-Pure Lead Long Standby Life

## PLH110FT(A) (12V110Ah)




### Specifications

Rated Voltage	12V	
Nominal Capacity	$C_{10}, 1.80V/cell$	110Ah
	$C_8, 1.75V/cell$	110Ah
Dimension	Length	559±3mm (22.01 inches)
	Width	125±2mm (4.92 inches)
	Container Height	227±3mm (8.94 inches)
	Total Height	227±3mm (8.94 inches)
Approx. Weight	36.5 Kg (80.3 lbs)	
Terminal	M6	
Container Material	PC-ABS flame retardant jar and cover to UL94 V-0	
Rated Capacity (25°C)	116.0 Ah	(20hr, 5.80A, 1.80V/cell)
	110.0 Ah	(10hr, 11.0A, 1.80V/cell)
	101.0 Ah	(5hr, 20.2A, 1.75V/cell)
	98.1 Ah	(3hr, 32.7A, 1.75V/cell)
	77.1 Ah	(1hr, 77.1A, 1.67V/cell)
Max. Discharge Current	1320A	
Internal Resistance (25°C)	Approx. 4.0mΩ(Fully charged)	
Operating Temp.Range	Discharge	-40 ~ 65°C (-40 ~ 149°F)
	Charge	0 ~ 54°C (32 ~ 129°F)
	Storage	-20 ~ 40°C (-4 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current(25°C)	33.0A	
Charge voltage(25°C)	Float	13.62V
	Temp. Coefficient	-3mV/cell/°C
	Equalization	14.1~14.4V
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	<p>PLH series batteries can be stored up to 24 months at 25°C(77°F), For higher temperatures the time interval will be shorter.</p> <p>Battery needs to be given a freshening charge when the OCV approach 2.10V/cell or when the maximum storage time is reached, whichever occurs first.</p>	

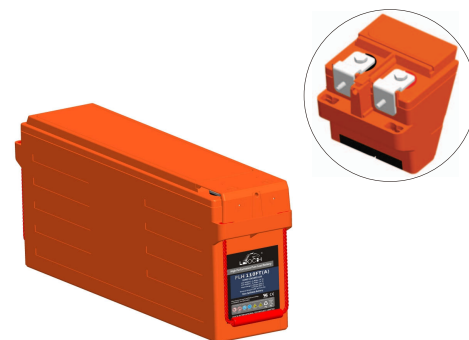

### Layout

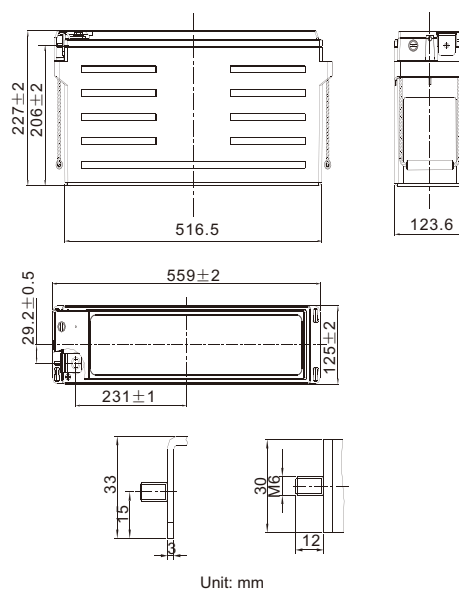

### Constant Current Discharge (Amperes) at 25 °C (77° F)

F.V/Time	10 min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	213.0	177.7	152.2	121.2	89.1	67.5	43.1	30.6	24.5	20.3	13.1	10.9	5.63
1.80V/cell	239.3	198.8	164.8	127.1	94.1	72.0	44.8	31.9	24.9	20.5	13.4	11.0	5.76
1.75V/cell	260.4	209.4	176.2	135.4	98.4	75.2	46.1	32.7	25.5	20.7	13.8	11.2	5.83
1.70V/cell	280.6	221.5	185.6	140.8	101.0	76.2	47.3	33.3	25.9	21.0	13.9	11.4	5.92
1.67V/cell	296.2	230.6	190.2	145.8	102.5	77.1	47.5	33.9	26.1	21.6	14.1	11.9	5.96
1.60V/cell	312.8	241.2	197.5	147.2	103.5	78.2	47.9	34.3	26.3	21.8	14.3	12.1	6.06

### Constant Power Discharge (Watts/cell) at 25 °C (77° F)

F.V/Time	10 min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	404.5	340.0	292.9	235.9	175.1	133.7	86.2	61.3	49.5	41.2	26.7	22.2	11.5
1.80V/cell	449.4	375.2	314.0	245.8	183.8	142.0	89.0	63.6	50.0	41.7	27.2	22.4	11.8
1.75V/cell	482.0	391.6	332.8	259.8	191.0	147.3	91.2	64.9	51.1	41.9	28.1	22.8	11.9
1.70V/cell	513.5	409.9	347.2	267.9	194.9	148.5	93.1	65.9	51.8	42.1	28.1	23.1	12.0
1.67V/cell	533.7	423.3	353.1	276.2	196.8	149.7	93.1	66.8	52.0	43.2	28.4	24.0	12.0
1.60V/cell	554.3	434.6	362.5	276.2	197.3	150.4	93.2	67.2	52.2	43.5	28.7	24.3	12.2



# PLH-Pure Lead Long Standby Life

## PLH110FT(A) (12V110Ah)



### Applications

- Telecommunication
- Railway signal
- Alarm and security system
- Power station systems
- Emergency power supply


### General Features

- 20 years design life(25°C)
- Premium ABS+PC jar & covers, Flame Retardant to UL94 V-0
- High-rate performance, high energy density
- High quality AGM separators minimize electrical resistance to allow high current discharging properties


### Standards

- Compliance with IEC 60896 standards
- Classified as "Very Long Life" according to Eurobat
- CE, UL Certified
- Manufactured in Leoch@IATF16949, OHSAS 18001, ISO 9001 and ISO 14001 certified production facilities


### Discharge Characteristics

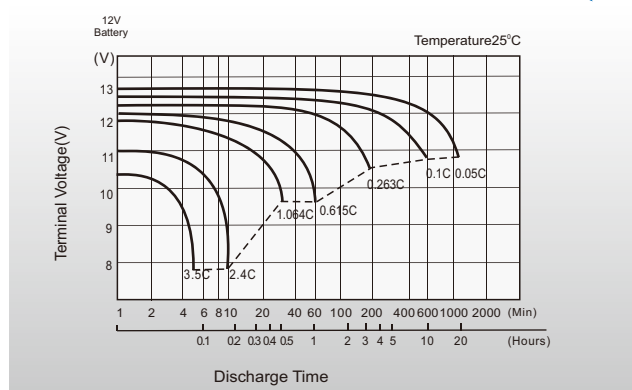


### Float Charging Characteristics

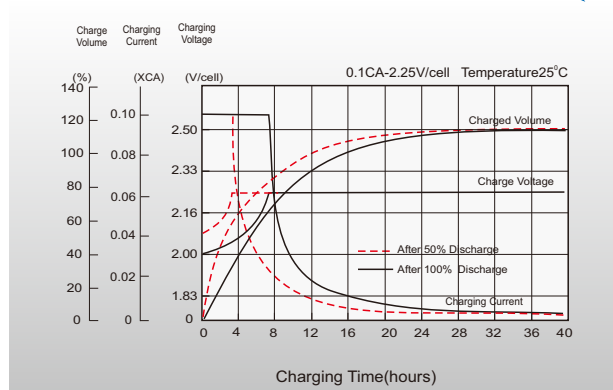

### Effects of Temperature on Discharging Time

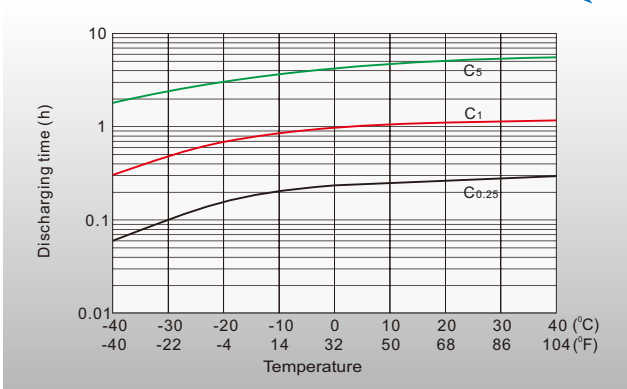

### Float Life

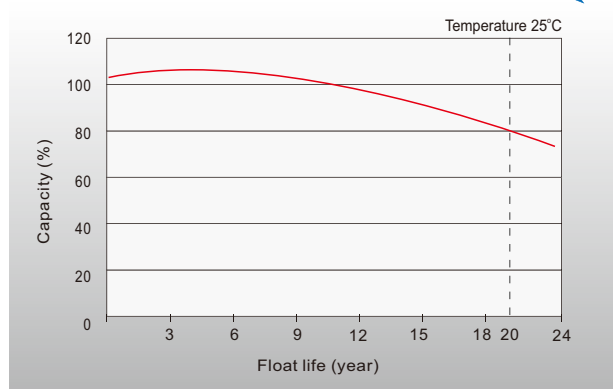

## Sales Offices Worldwide

#### China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,  
Nanshan, Shenzhen, China. 518052  
Tel: +86-755-86036060 (100 lines)  
Fax: +86-755-26067269  
E-mail: export@leoch.com

#### HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,  
Tsuen Wan, New Territories, Hong Kong  
Tel: +852 35786666  
Fax: +44 1452 690125  
E-mail: sales.hk@leoch.com

#### Singapore Sales Office

No. 1 Tech Park Crescent,  
Singapore 638131  
Tel: +65 68636078  
Fax: +65 6863 6079  
Email: sales.sg@Leoch.com

#### Australia Sales Office

2 /29 Tarlington Place, Smithfield. NSW 2164  
Australia  
Tel: 02 9756 0950  
E-mail: sales.au@leoch.com

#### North America Sales Office

19751 Descartes  
Foothill Ranch, CA 92610, USA  
Tel: 949-588-5853  
Fax: 949-588-5966  
E-mail: sales@leoch.us

#### UK Sales Office

9B Wheatstone Court, Waterwells, Business Park,  
Gloucester, GL2-2AQ, UK United Kingdom  
Tel: +44(0) 1452 729428 / 1452 729696  
Fax: +44 1452 690125  
E-mail: Sales.Europe@leoch.com

#### EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,  
Greece  
Tel: +30 210 5760318 (2 lines)  
E-mail: support\_EMEA@leoch.com

#### India Sales Office

Shed no. A-53(b), 2nd Stage of Peenya Industrial Area,  
Bangalore North Taluk, Bangalore-560058, India  
Tel: +91-80-23440018/23440019  
Fax: +91-80-23440017  
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)  
[Http://www.leoch.us](http://www.leoch.us)

© 2021 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.  
Subject to revisions without prior notice.

Publication No.: LB-PLH110FT(A)-PD-EN-V3.4-202101