




PLH+C-Pure Lead Carbon


PLH+C 100FT (12V100Ah)

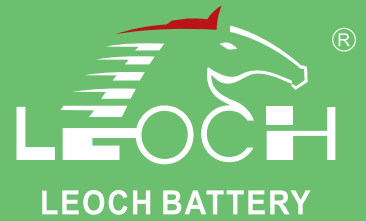

Specifications

Rated Voltage	12V	
Nominal Capacity	C ₁₀ , 1.80V/cell	100Ah
	C ₈ , 1.75V/cell	100Ah
Dimension	Length	405.4±2mm (15.96 inches)
	Width	108±2mm (4.25 inches)
	Container Height	287±2mm (11.30 inches)
	Total Height	287±2mm (11.30 inches)
Approx. Weight	30.8 Kg (67.9 lbs)	
Terminal	M8	
Container Material	PC-ABS flame retardant jar and cover to UL94 V-0	
Rated Capacity (25°C)	100 Ah	(10hr, 10.0A, 1.80V/cell)
	100 Ah	(8hr, 12.5A, 1.75V/cell)
	94.5 Ah	(5hr, 18.9A, 1.75V/cell)
	84.0 Ah	(3hr, 28.0A, 1.75V/cell)
	72.4 Ah	(1hr, 72.4A, 1.67V/cell)
Max. Discharge Current	1200A	
Internal Resistance (25°C)	Approx. 4.5mΩ(Fully charged)	
Operating Temp.Range	-40 ~ 65°C (-40 ~ 149°F)	
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current(25°C)	Normal Charge 0.3C	
Charge voltage(25°C)	Float	13.62V
	Temp. Coefficient	-3mV/cell/°C
	Equalization	14.1~14.4V
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	<p>PLH+C series batteries can be stored up to 24 months at 25°C(77°F). For higher temperatures the time interval will be shorter.</p> <p>Battery needs to be given a freshening charge when the OCV approach 2.10V/cell or when the maximum storage time is reached, whichever occurs first.Storage temp. advised: 0 - 40°C</p>	

Layout

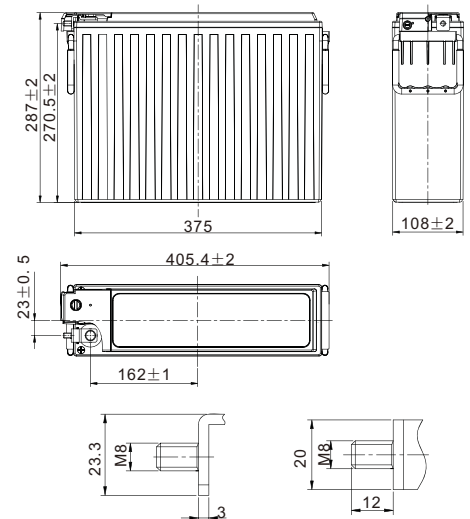

Constant Current Discharge (Amperes) at 25 °C (77°F)


F.V/Time	10 min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	185.9	153.1	131.0	102.5	78.2	63.8	37.4	26.7	21.0	18.3	12.1	9.90	5.31
1.80V/cell	206.4	167.6	142.0	109.8	82.7	66.9	38.5	27.4	21.4	18.6	12.3	10.0	5.43
1.75V/cell	225.6	180.8	151.7	115.9	86.5	69.4	39.6	28.0	21.7	18.9	12.5	10.2	5.54
1.70V/cell	242.7	192.1	160.0	120.9	89.6	71.4	40.3	28.3	22.0	19.2	12.7	10.3	5.62
1.67V/cell	251.9	197.8	163.9	123.3	90.9	72.4	40.6	28.5	22.2	19.3	12.8	10.3	5.65
1.60V/cell	268.5	207.3	170.2	126.7	92.7	73.6	41.2	28.9	22.5	19.5	12.9	10.5	5.70

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10 min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	358.5	286.8	251.0	192.6	150.9	123.5	73.2	52.6	41.3	36.1	24.0	19.7	10.5
1.80V/cell	401.2	314.7	271.4	204.5	157.3	130.3	76.1	53.7	42.1	36.6	24.3	19.9	10.8
1.75V/cell	431.1	334.0	285.4	213.6	160.5	134.7	77.8	54.7	42.7	37.2	24.6	20.2	11.0
1.70V/cell	448.5	345.0	293.3	218.5	163.6	138.1	79.1	55.4	43.2	37.7	24.9	20.4	11.1
1.67V/cell	467.8	357.5	302.4	224.4	167.3	139.6	79.7	55.7	43.5	37.9	25.0	20.5	11.2
1.60V/cell	481.6	365.9	308.0	227.7	169.2	141.4	80.4	56.2	43.8	38.2	25.2	21.1	11.2



PLH+C-Pure Lead Carbon PLH+C 100FT (12V100Ah)

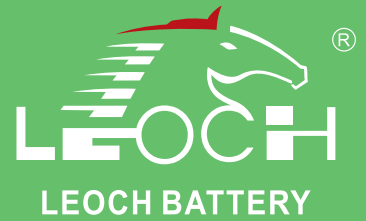

Applications

- Backup Power
- Telecom base station with unstable mains


General Features

- 20 years design life(25°C)
- High energy density
- Low internal resistance and self-discharge rate
- Excellent high rate discharge performance in low temperature


Standards

- Compliance with IEC 60896 standards
- Manufactured in Leoch@IATF16949, ISO 18001,ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

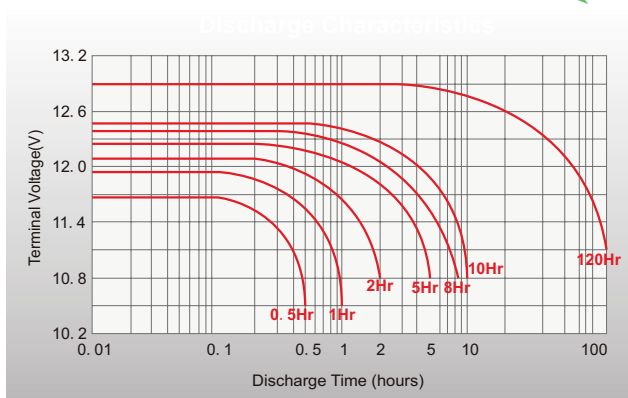


Temperature in Relation to Capacity

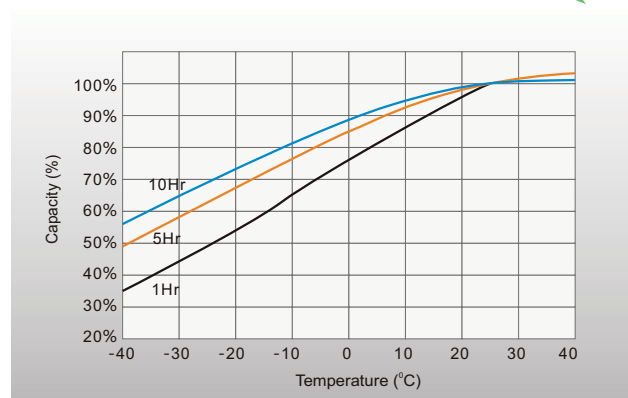

Discharge Characteristics

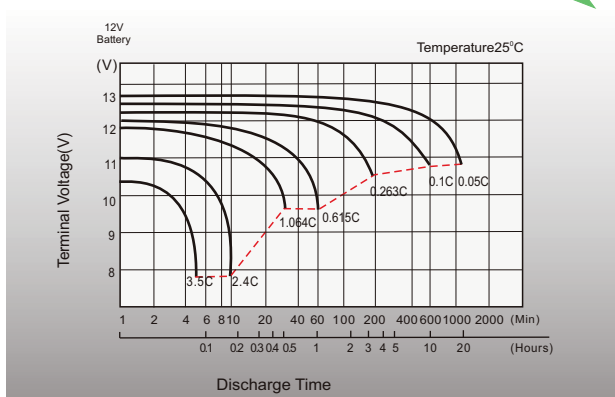

Self-discharge Characteristics

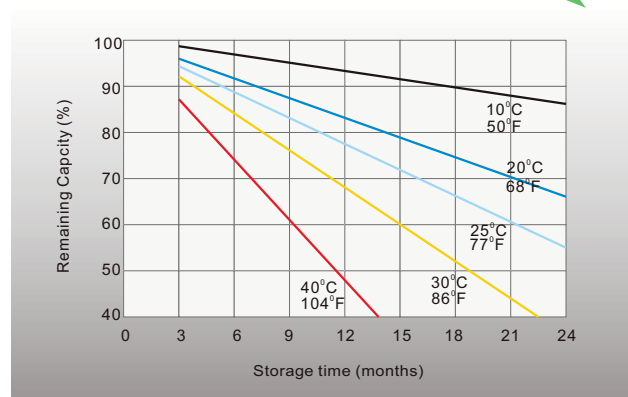

Sales Offices Worldwide

China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,
Nanshan, Shenzhen, China. 518052
Tel: +86-755-86036060 (100 lines)
Fax: +86-755-26067269
E-mail: export@leoch.com

HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,
Tsuen Wan, New Territories, Hong Kong
Tel: +852 35786666
Fax: +44 1452 690125
E-mail: sales.hk@leoch.com

Singapore Sales Office

No. 1 Tech Park Crescent,
Singapore 638131
Tel: +65 68636078
Fax: +65 6863 6079
Email: sales.sg@Leoch.com

Australia Sales Office

2/29 Tarlington Place, Smithfield. NSW 2164
Australia
Tel: 02 9756 0950
E-mail: sales.au@leoch.com

North America Sales Office

19751 Descartes
Foothill Ranch, CA 92610, USA
Tel: 949-588-5853
Fax: 949-588-5966
E-mail: sales@leoch.us

UK Sales Office

9B Wheatstone Court, Waterwells, Business Park,
Gloucester, GL2-2AQ, UK United Kingdom
Tel: +44(0) 1452 729428 / 1452 729696
Fax: +44 1452 690125
E-mail: Sales.Europe@leoch.com

EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,
Greece
Tel: +30 210 5760318 (2 lines)
E-mail: support_EMEA@leoch.com

India Sales Office

Shed no.A-53(b), 2nd Stage of Peenya Industrial Area,
Bangalore North Taluk, Bangalore-560058, India
Tel: +91-80-23440018/23440019
Fax: +91-80-23440017
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)
[Http://www.leoch.us](http://www.leoch.us)

© 2021 LEOCH. All rights reserved.
Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.
Subject to revisions without prior notice.

Publication No.: LB-PLH+C 100FT-PD-EN-V3.3-202111