



PLX-Pure Lead High Rate

PLX12-500 (12V500W)



Specifications

Rated Voltage	12V	
Nominal Rate ($W_{15}, 1.67V/cell$)	500W	
Nominal Capacity ($C_{10}, 1.80V/cell$)	125Ah	
Dimension	Length	340.9±2mm (13.42 inches)
	Width	170±2mm (6.69 inches)
	Container Height	273.2±2mm (10.76 inches)
	Total Height	275.7±2mm (10.85 inches)
Approx. Weight	41.7 Kg (91.9 lbs)	
Terminal	M6	
Container Material	PC-ABS flame retardant jar and cover to UL94 V-0	
Max. Discharge Current	1500A	
Internal Resistance (25°C)	Approx. 3.40mΩ(Fully charged)	
Operating Temp. Range	Discharge	-40 ~ 65°C (-40 ~ 149°F)
	Charge	0 ~ 54°C (32 ~ 129°F)
	Storage	-20 ~ 40°C (-4 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max. Charging Current (25°C)	37.5A	
Charge voltage (25°C)	Float	13.62V
	Temp. Coefficient	-3mV/cell/°C
	Equalization	14.1~14.4V
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%


Self Discharge

PLX series batteries can be stored up to 24 months at 25°C(77°F), For higher temperatures the time interval will be shorter.

Battery needs to be given a freshening charge when the OCV approach 2.10V/cell or when the maximum storage time is reached, whichever occurs first.



Layout

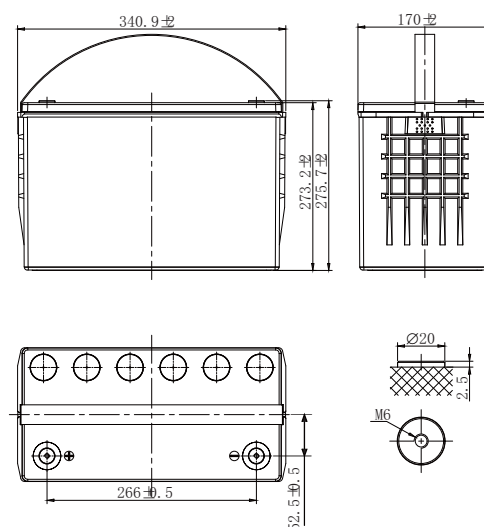

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	321.0	249.6	196.5	174.9	140.9	104.5	85.2	47.6	35.3	27.3	23.2	15.9	12.3	6.38
1.80V/cell	361.3	287.7	218.9	191.1	150.5	109.8	88.6	49.8	36.9	28.4	24.3	16.4	12.5	6.50
1.75V/cell	395.0	315.0	237.2	203.9	160.2	112.9	91.1	51.2	37.8	29.2	24.8	16.6	12.7	6.58
1.70V/cell	425.6	340.6	252.4	214.5	166.3	117.0	94.6	51.9	38.6	29.7	25.2	16.8	12.8	6.63
1.67V/cell	475.0	358.8	266.1	222.8	173.1	121.6	96.7	52.9	39.0	30.1	25.4	17.0	12.9	6.68
1.60V/cell	513.4	364.8	275.1	229.0	176.4	123.4	98.3	53.7	39.5	30.4	25.7	17.2	13.0	6.73

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	639.3	488.1	386.4	345.8	280.0	208.6	170.5	95.6	71.4	55.4	47.3	32.5	25.2	13.2
1.80V/cell	713.9	557.1	426.4	374.3	296.7	217.6	176.3	99.4	74.0	57.3	49.2	33.4	25.6	13.4
1.75V/cell	766.0	604.2	457.9	395.7	312.8	221.8	179.9	101.5	75.5	58.5	50.0	33.7	25.8	13.5
1.70V/cell	807.9	646.0	481.4	411.8	321.5	227.5	185.4	102.3	76.4	59.1	50.4	33.9	26.0	13.5
1.67V/cell	870.0	675.4	500.0	425.2	332.7	235.0	188.4	103.6	76.8	59.6	50.6	34.1	26.1	13.6
1.60V/cell	887.6	680.3	516.3	432.9	335.8	236.6	189.8	104.2	77.1	59.7	50.6	34.1	26.1	13.6



PLX-Pure Lead High Rate PLX12-500 (12V500W)



Applications

- UPS
- Emergency lighting
- Emergency power supply
- Electrical starting
- Power tools


General Features

- 15 years design life(25°C)
- Premium ABS+PC jar & covers, Flame Retardant to UL94 V-0
- High-rate performance, high energy density
- High quality AGM separators minimize electrical resistance to allow high current discharging properties


Standards

- Classified as "Very Long Life" according to Eurobat
- CE, UL Certified
- Manufactured in Leoch@IATF16949, OHSAS 18001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

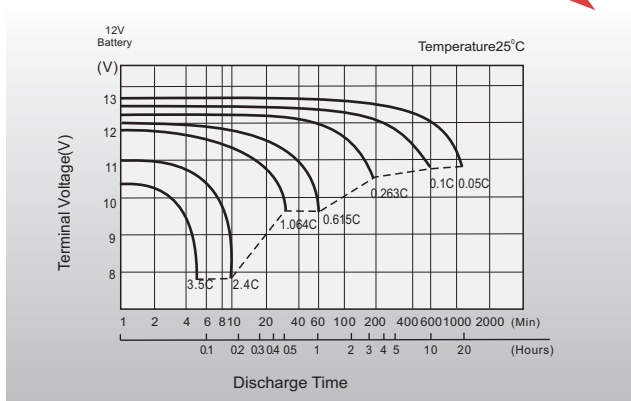


Float Charging Characteristics

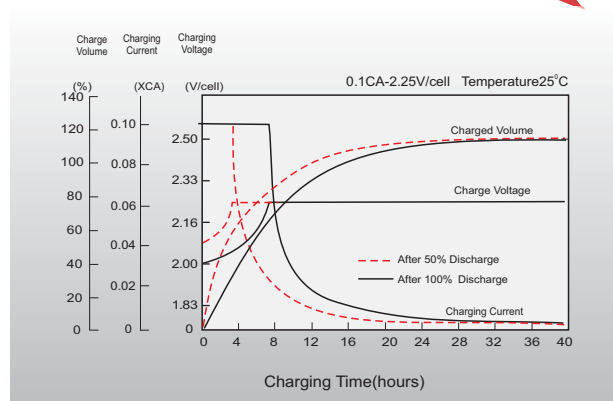

Effects of Temperature on Discharging Time

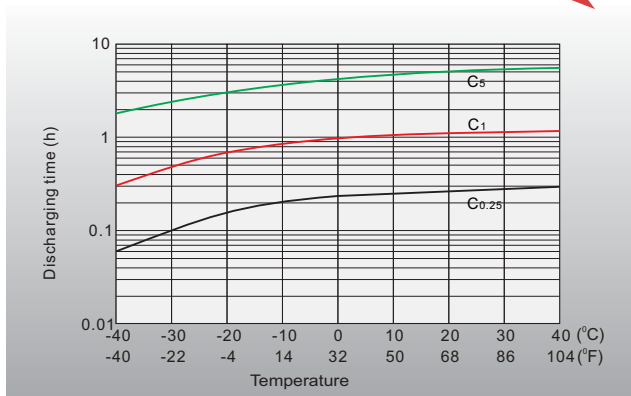

Self-discharge Characteristics

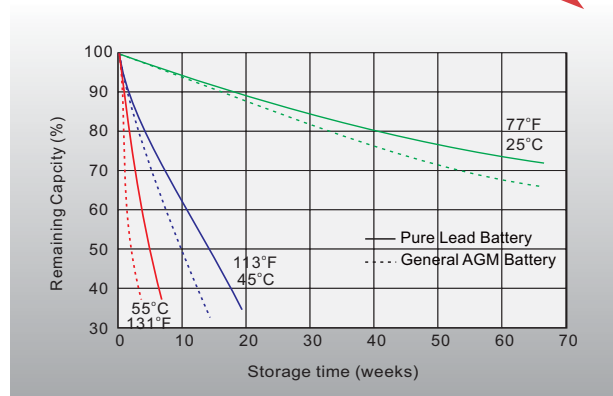

Sales Offices Worldwide

China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,
Nanshan, Shenzhen, China. 518052
Tel: +86-755-86036060 (100 lines)
Fax: +86-755-26067269
E-mail: export@leoch.com

HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,
Tsuen Wan, New Territories, Hong Kong
Tel: +852 35786666
Fax: +44 1452 690125
E-mail: sales.hk@leoch.com

Singapore Sales Office

No. 1 Tech Park Crescent,
Singapore 638131
Tel: +65 68636078
Fax: +65 6863 6079
Email: sales.sg@Leoch.com

Australia Sales Office

2 /29 Tarlington Place, Smithfield. NSW 2164
Australia
Tel: 02 9756 0950
E-mail: sales.au@leoch.com

North America Sales Office

19751 Descartes
Foothill Ranch, CA 92610, USA
Tel: 949-588-5853
Fax: 949-588-5966
E-mail: sales@leoch.us
Http:// www.leoch.us

UK Sales Office

9B Wheatstone Court, Waterwells, Business Park,
Gloucester, GL2-2AQ, UK United Kingdom
Tel: +44(0) 1452 729428 / 1452 729696
Fax: +44 1452 690125
E-mail: Sales.Europe@leoch.com
Http:// www.leoch.eu

EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,
Greece
Tel: +30 210 5760318 (2 lines)
E-mail: support_EMEA@leoch.com
Http:// www.leoch.eu

India Sales Office

Shed no.A-53(b), 2nd Stage of Peenya Industrial Area,
Bangalore North Taluk, Bangalore-560058, India
Tel: +91-80-23440018/23440019
Fax: +91-80-23440017
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)

© 2021 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.
Subject to revisions without prior notice.

Publication No.: LB-PLX12-500-PD-EN-V1.2-202101